


TOP VIEW

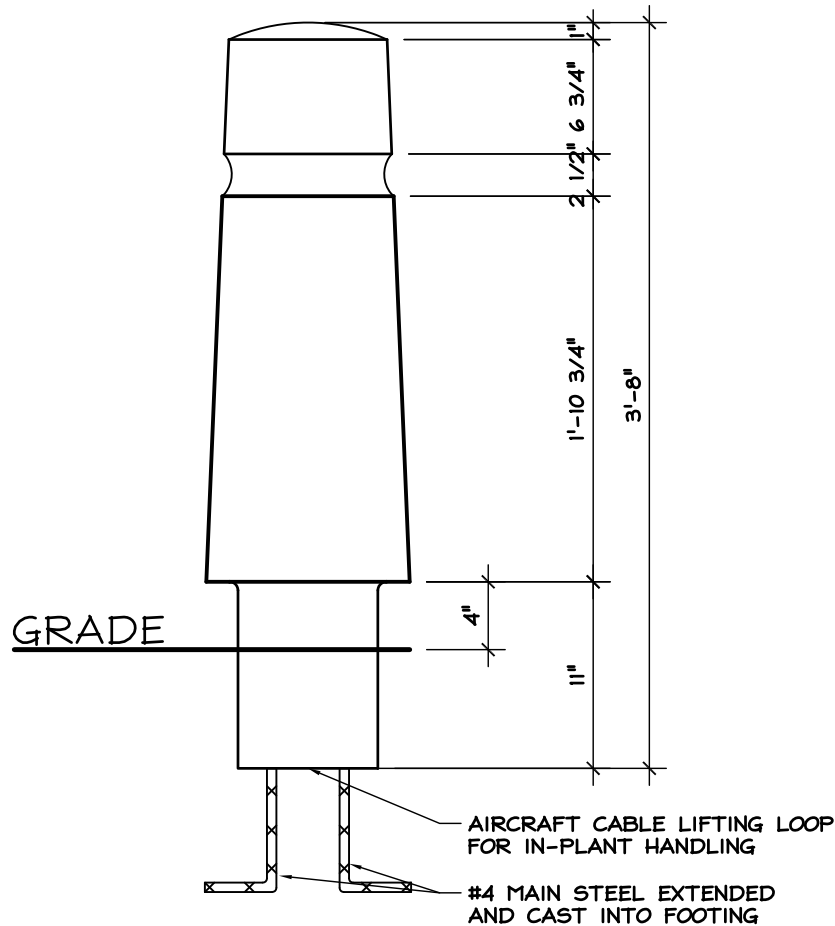

ELEVATION

WEIGHT: 380#

CONCRETE SPECIFICATIONS

4000 f'c 28-DAY COMPRESSIVE STRENGTH

4-7% ENTRAINED AIR

MILD STEEL REINFORCING AS REQUIRED

POLYPROPYLENE FIBER SECONDARY REINFORCING

FORMS

SMOOTH SURFACE FIBERGLASS

COLORS

GREY OR INTEGRAL COLOR (COHILLS COLOR PIGMENTS AVAILABLE)

FINISHES

A RANGE OF SANDBLAST TEXTURES

SMOOTH AS-CAST

ACID WASHED

CLEAR SEALER

TAPERED CYLINDER  
BOLLARD

CONCRETE

ARCHITECTURAL PRECAST CONCRETE  
**MATERIALS, INC.**