

**PRODUCT INFORMATION**



The Diamond<sup>®</sup> retaining wall system is the contractor's choice for wall construction. Straight- or beveled-face shapes offer design freedom. Optional step and cap accessories provide even more design versatility. For an attractive retaining wall with enduring performance, the Diamond product is the perfect choice.

- Original rear-lip locator
- Gravity walls up to 4 feet 6 inches high, including buried course, but excluding the cap\*
- Taller walls can be built using geosynthetic reinforcement or the Anchorplex<sup>™</sup> retaining wall system when designed by a qualified engineer
- ICC evaluated

**Straight Face**

- Minimum outside radius, measured on the top course to the front of the units: 4 feet
- Minimum inside radius, measured on the base course to the front of the units: 8 feet

**Beveled Face**


- Minimum outside radius, measured on the top course to the front of the units: 2 feet
- Minimum inside radius, measured on the base course to the front of the units: 4 feet

*\*This height assumes cores are filled with drainage aggregate, level backfill and clean, compacted sand or gravel and no surcharge.*





## PRODUCT INFORMATION

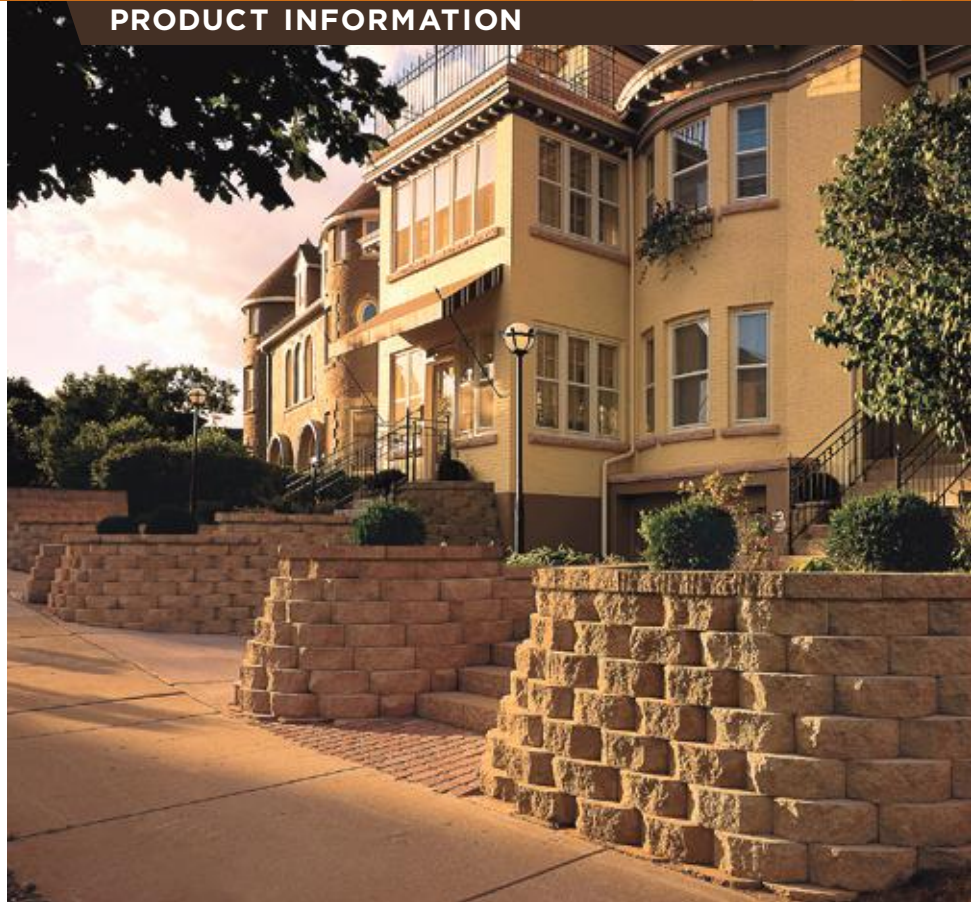

**No pins. No mortar. No misalignments.** Rear-lip locator, invented by Anchor, makes installation fast and accurate. Anchor - the original rear-lip product!



Visit [anchorwall.com](http://anchorwall.com) for installation instructions.



### Stretcher Units

	Straight Face	Beveled Face
Approximate Dimensions*	6" x 17 <sup>1</sup> / <sub>4</sub> " x 12"	6" x 15 <sup>7</sup> / <sub>8</sub> " x 12"
Approximate Weight*	72 lbs.	68 lbs.
Coverage	0.72 sq. ft.	0.67 sq. ft.
Setback/System Batter	1 <sup>1</sup> / <sub>8</sub> " / 10.6°	1 <sup>1</sup> / <sub>8</sub> " / 10.6°



### Accessory Units

	Cap	Step
Approximate Dimensions*	Front, 3" x 17 <sup>1</sup> / <sub>4</sub> " x 10 <sup>3</sup> / <sub>8</sub> " Back, 3" x 12" x 10 <sup>3</sup> / <sub>8</sub> "	6" x 16" x 12"
Approximate Weight*	34 lbs.	89 lbs.
Coverage	1.22 lin. ft.	

\*Product dimensions are height by face length by depth. Actual dimensions and weights may vary from these approximate values due to variations in manufacturing processes. Specifications may change without notice. See your Anchor representative for details, color options, block dimensions and additional information.

Anchor Wall Systems, Inc., 5959 Baker Road, Suite 390, Minnetonka, MN 55345.

A&B0810

72.3076.1 10/11 4015