



ELEVATION



PLAN

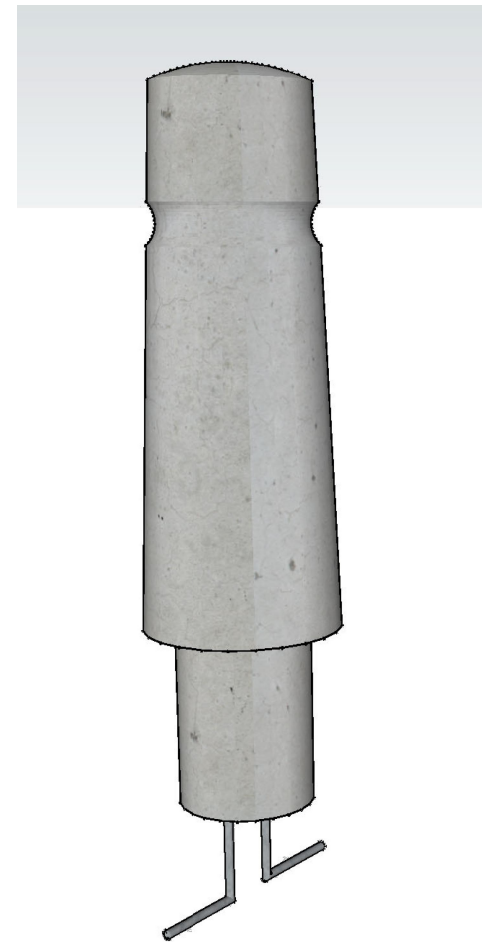

3D ISOMETRIC

**SHEET NOTES:**

1. CONCRETE SPECIFICATIONS
  - 1.1. 5000 PSI COMPRESSIVE STRENGTH @ 28 DAYS
  - 1.2. 5%-8% ENTRAINED AIR
  - 1.3. POLYPROPYLENE FIBER
2. REINFORCING SPECIFICATIONS
  - 2.1. REBAR TO MEET ASTM A615, GRADE 60
  - 2.2. WELDED WIRE MESH TO MEET ASTM A1064
3. COLOR AND FINISH OPTIONS
  - 3.1. GREY, WHITE, VARIOUS COHILLS COLORS
  - 3.2. SMOOTH, ACID WASH, EXPOSED AGG
  - 3.3. SEALER: VOCOMP 20

**BL1236 MATERIAL LIST:**

1. 0.097 CU.YD. CONCRETE
  - 1.1. APPROX. 380 LBS
2. (2) #4 DOWELS
3. 2'- AIR CRAFT CABLE
4. FIBER REINFORCING

SHEET TITLE: DIMENSION DETAIL

PRODUCT: 12" DIA. X 36" BOLLARD

LOCATION:

CONTRACTOR:

ARCHITECT:

DATE:

SCALE: 1"=1'-0"

SHEET NO.: 1.0

